



system with operation cord

CORD









## system with operation cord



#### **Technical informations:**

- for plafond roof pitches till max. 15°
- System size: max. 12m<sup>2</sup> width max. 4000 mm / length max. 6000 mm
- → An additional profile (middle profile) must be used for system widths more than 2000 mm. Optionally, the velcro® profile can be supported with a stabilising profile, if it is not possible to mount a middle profile (up to max. 2700 mm).
- · Available colors:

alu profile rod: white, anthracite, alu-look - further colors on request alu profile with velcro $^{\circ}$  tape: white, alu-look

accessories in matching colors spring tensioner: white, anthracite

· All used plastics are uv-resistant.









### Scope of delivery:

- ready-made fabric with sewed velcro<sup>®</sup> tapes from regular distances of appr. 400 mm the sewing thread is uv-resistant
- aluminium profile rods with operating cord, operating unit, glider and guiding carriages
- operating handle set for operating one CORD system
- ceiling clips (recommendation every 50 cm)
- aluminium profile with velcro® tape and mounting hooks
- spring tensioner (cord weight available on request.)

#### without assembling screws



Child safety of interior privacy and sun screening:

The operating lengths have to be produced and assembled in consideration of the **EU Standard DIN EN13120**!



In strong wind or storm the purchaser shall be individually responsible for the adequate protection of the sunola wintergarden systems. In any warranty claims, please see our terms and conditions on **www.sunola.de**.










# system with operation cord



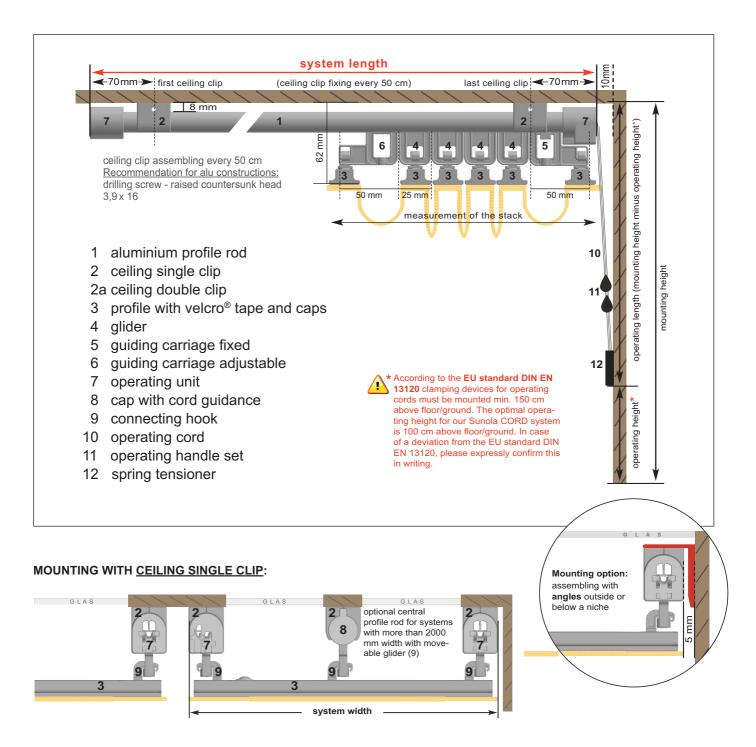

### MOUNTING WITH CEILING DOUBLE CLIP:

